


VG Clamp Connectors

Used for diverless connection of subsea flexible and rigid pipes, and umbilicals

Size range covers from

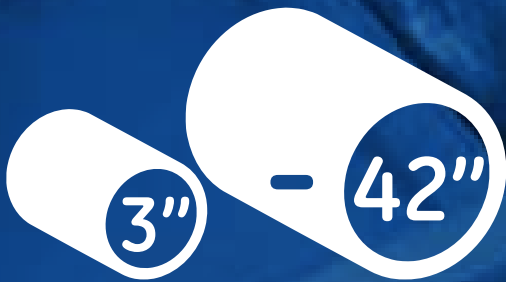

pipe size

Up to



15,000psi
design pressure with
metal-to-metal
sealing technology

More than



installed worldwide



400kg (3") 15,000kg (42")

Up to



years'
design life

Designed in Norway
- GE's Centre of Excellence
for Manifold and Connection
System technologies



Single, dual and multi-bore applications

Vertical and horizontal
connector configurations

